

Description of specifications

Linear actuator with rigid rod and high resistance to maximum loads.

Available version: 230V AC and 24V DC.

Designed and manufactured with Adjustable Stroke.


In compliance with the relevant European Directives.

Fitted with limit switches and relays for electrical connection in parallel.


Incorporated thermal overload protection.

Complete with Fixing brackets sliding along the Whole body.


Thrust/Tensile	450/700/1000 N
Voltage	230 V AC 50 Hz / 24V DC
Limit switch	Electronic
Protection degree	IP 55
Operating temperature	-10°C +40°C

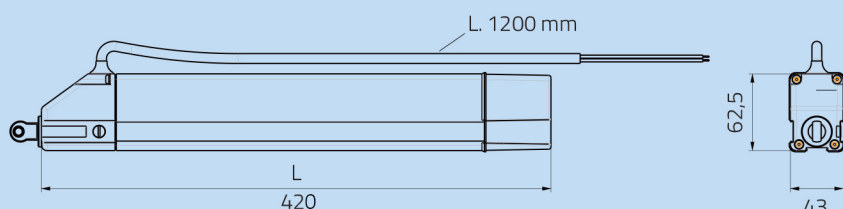

PACKAGE CONFIGURATION

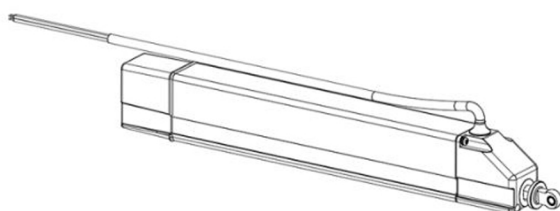

Actuator

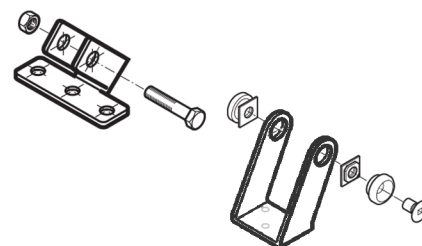

Kit actuator support bracket

ZEPHYR - 230V AC 50Hz

CODE	DESCRIPTION	STROKE	POWER	SPEED	LENGTH	COLOR
WIN2.3001	ZEPHYR 450	300 mm	35W	ca. 20 mm/s	420 mm	Anodized silver
WIN2.3002	ZEPHYR 700	300 mm	35W	ca. 13 mm/s	420 mm	Anodized silver
WIN2.3003	ZEPHYR 1000	300 mm	35 W	ca. 12 mm/s	420 mm	Anodized silver

ZEPHYR - 24V DC

CODE	DESCRIPTION	STROKE	POWER	SPEED	LENGTH	COLOR
WIN2.3101	ZEPHYR 450	300 mm	25W	ca. 20 mm/s	420 mm	Anodized silver
WIN2.3102	ZEPHYR 700	300 mm	25W	ca. 13 mm/s	420 mm	Anodized silver